




Technical Data

LARGE-CAPACITY SOAP DISPENSER FOR LIQUID AND LOTION SOAPS, AND DETERGENTS

B-60

Distributed by
www.PandaProducts.com
 Phone: (800) 608-6568
 Fax: (409) 840-5545
 info@pandaproducts.com

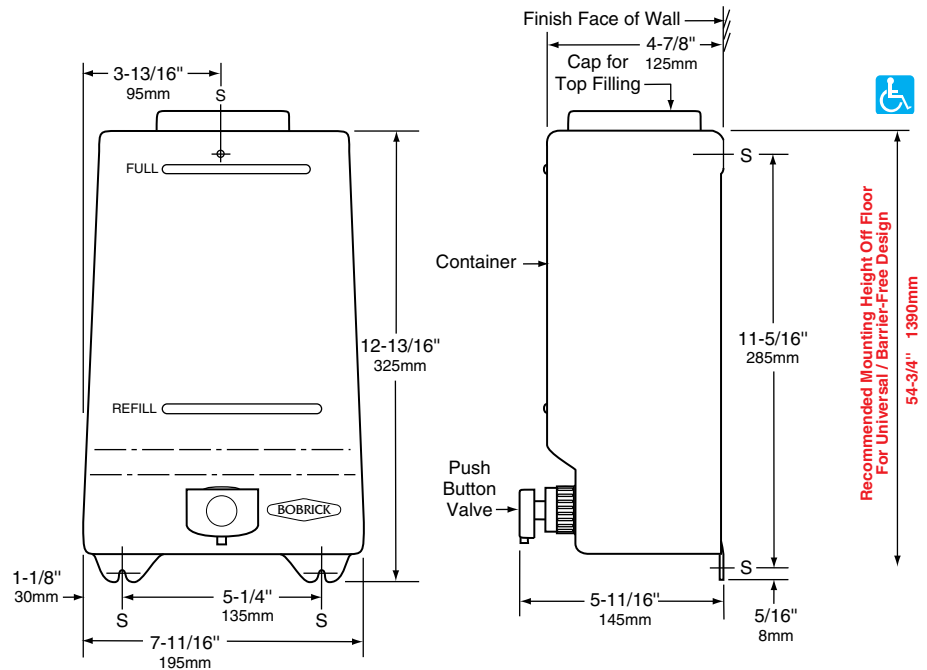

MATERIALS:

Valve — High-impact-resistant ABS push button, spout, and threaded cylinder. Soap head-holding capsule valve. Stainless steel spring. U-packing seal, duckbill, and grommet.

Container — Translucent, shatter-resistant polyethylene. Equipped with impact-resistant polypropylene cap for top filling. Capacity: 1.5-gal. (5.7-L).

OPERATION:

Corrosion-resistant valve dispenses commercially marketed all-purpose hand soaps. Valve is operable with one hand, without tight grasping, pinching, or twisting of the wrist and with less than 5 pounds of force (22.2 N) to comply with barrier-free accessibility guidelines (including ADAAG in U.S.A.). Large-capacity, translucent container provides visible soap level. To fill container, unscrew and remove the large cap.

INSTALLATION:

Mount dispenser on wall with three sheet-metal screws, furnished by manufacturer, at points indicated by an S. Rubber washer must be used inside container to seal top mounting hole. For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 1/8" (3mm) toggle bolts or expansion bolts.

Note: Provide 4" (102mm) minimum clearance from cap to underside of any horizontal projection. Push buttons should be located 44" (1120mm) maximum above the finish floor.

SPECIFICATION:

Soap dispenser shall have high-impact-resistant ABS push button, spout, and threaded cylinder. Corrosion-resistant valve shall have soap head-holding capsule valve, stainless steel spring, U-packing seal, duckbill, and grommet; and shall dispense commercially marketed all-purpose hand soaps. Valve shall operate with one hand and with less than 5 pounds of force (22.2 N) to comply with barrier-free accessibility guidelines (including ADAAG in U.S.A.). Container shall be translucent, shatter-resistant polyethylene with a capacity of 1.5-gal. (5.7-L) and furnished with a large cap for top filling. Manufacturer's service and parts manual shall be provided to the building owner/manager upon request.

Soap Dispenser shall be Model B-60 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.