
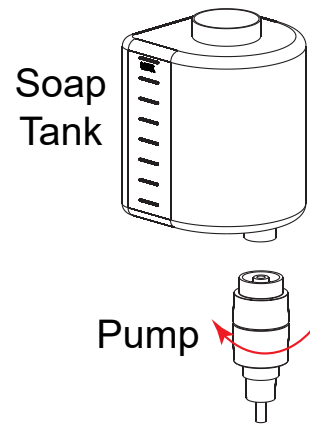



PUMP REPLACEMENT INSTALLATION INSTRUCTIONS

B-2013 AUTOMATIC WALL-MOUNTED FOAM SOAP DISPENSER
2013-25 FOAM AND 2013-25-L LIQUID PUMP

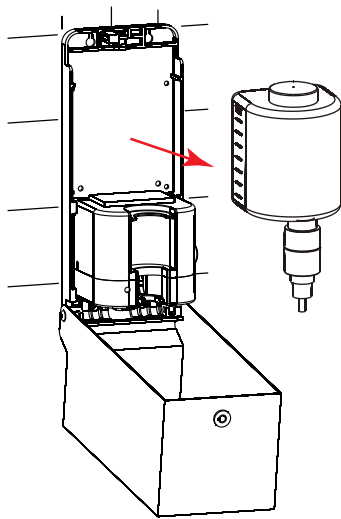


1. Remove soap tank and pump from base plate.

2. Unscrew pump clockwise to remove from soap tank.

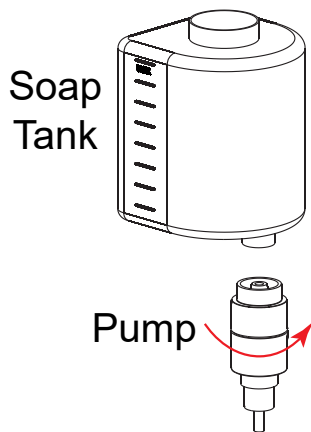

3. Screw new pump counter-clockwise onto soap tank.

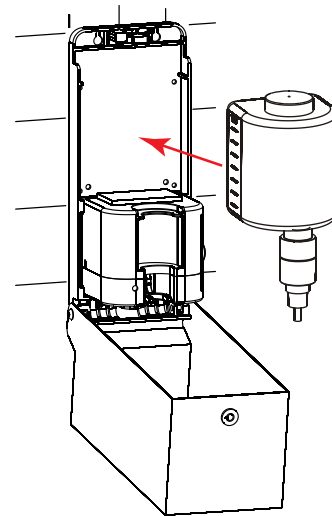

4. Place soap tank with new pump connected onto base plate.



© 2020 by Bobrick Washroom Equipment, Inc.
2013-69 r08/13/2020



Distributed by
www.AmeraProducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com